

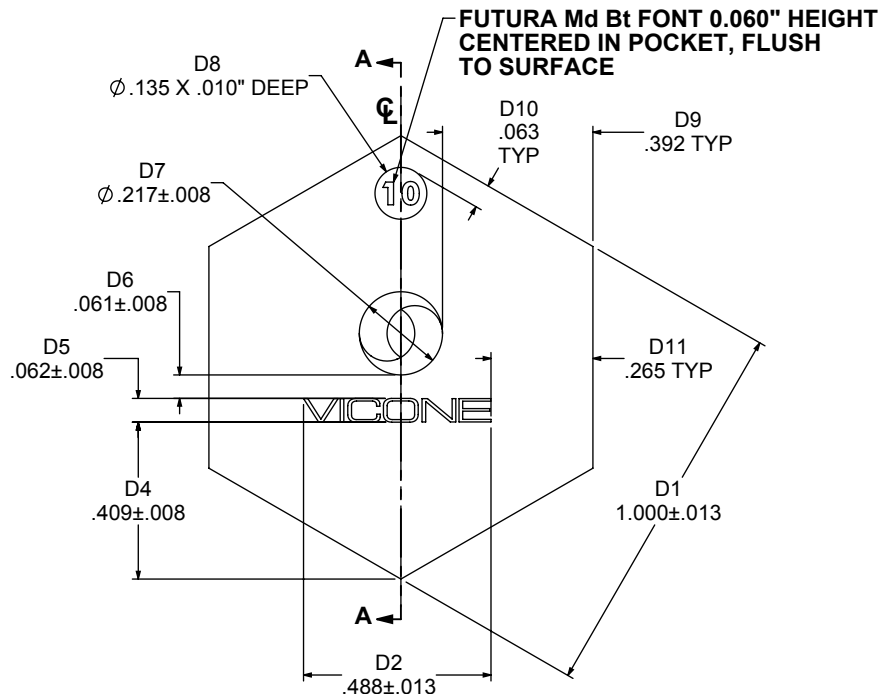




**TOP FINISH - SPI-B2  
NO TOOL OR SCUFF MARKS**



**FINISH ON SIDES  
SPI-C2 (F3)**



**SCALE 1:1**

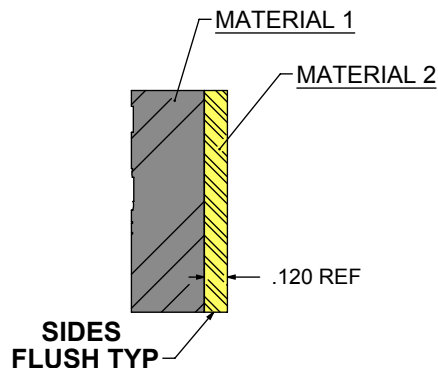

**SECTION A-A  
SCALE 1:1**

**NOTES:**

**MATERIAL#1 - VicoSeal™003R - 30 DURO  
MATERIAL#2 - 11 ga CRS YELLOW ANODIZED  
NATURAL RUBBER VULCANIZED TO YELLOW ANODIZED STEEL, RoHS APPROVED**

Tensile Strength	ASTMD412	Mpa	7.6
Elongation at break	ASTMD412	%	705.6
Hardness	ASTMD2240		29
Compression set (22hrs @ 70°C)	ASTMD395	%	6.18
Density	ASTMD3165		1.0733
Heat aging (70hrs @ 70°C)			
Change in Tensile strength	ASTMD573	%	-35.5
Change in Elongation	ASTMD573	%	-10.3
Change in Hardness	ASTMD573		5
Compression Stress Modulus			
Compression 5%		Mpa	0.22
Compression 10%		Mpa	0.34
Compression 20%		Mpa	0.55
Compression 25%		Mpa	0.74

Drawn  
John Fisher

Date  
05/10/11

Checked  
Eric Leclair

Date  
07/07/11

Approved  
Eric Leclair

Date  
03/09/12

Material  
SEE NOTES

Colour  
BLACK

Finish  
SEE NOTES



VICONE High Performance Rubber Inc.  
12-216 Pointier Street  
St. Eustache, Quebec, J7R 6B1  
www.viconerubber.com  
877-VICONE2 (842-6632)

Title -  
HEX SAMPLE #10

Scale:2:1

Sheet 1 of 1

DWG #  
MD00421

Rev #  
00

This drawing, design, and/or concept, along with all of the contents herein are the exclusive ownership of Vicone High Performance Rubber Inc. Its reproduction and/or distribution are strictly prohibited. Copyright Vicone High Performance Rubber Inc.

TOLERANCES - IMPERIAL  
( unless specified otherwise )

**RMA-A3-T0.016"**

