


**TOP FINISH - SPI-B2
NO TOOL OR SCUFF MARKS**



Tensile Strength	ASTMD412	Mpa	12.1
Elongation at break	ASTMD412	%	540.8
Hardness	ASTMD2240		63
Compression set (22hrs @ 100°C)	ASTMD395	%	6.49
Density	ASTMD3165		1.497
Heat aging (70hrs @ 100°C)			
Change in Tensile strength	ASTMD573	%	-1.7
Change in Elongation	ASTMD573	%	-20.4
Change in Hardness	ASTMD573		8
Compression Stress Modulus			
Compression 5%		Mpa	0.54
Compression 10%		Mpa	0.79
Compression 20%		Mpa	1.53
Compression 25%		Mpa	1.96

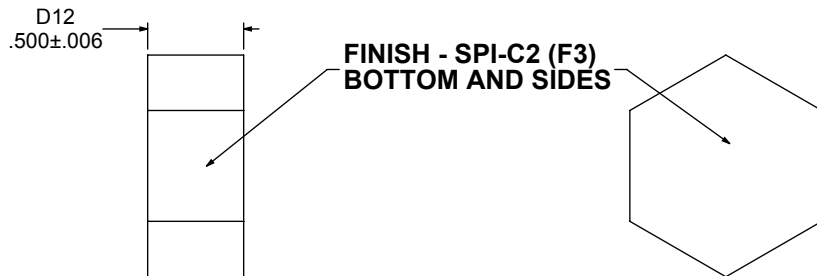

SCALE 1:1

NOTES:

SELF EXTINGUISHING, RoHS APPROVED

This drawing, design, and/or concept, along with all of the contents herein are the exclusive ownership of Vicone High Performance Rubber Inc. Its reproduction and/or distribution are strictly prohibited. Copyright Vicone High Performance Rubber Inc.

TOLERANCES - IMPERIAL
(unless specified otherwise)

RMA-A1-T0.016"



Drawn John Fisher	Date 05/10/11
Checked Eric Leclair	Date 07/07/11
Approved Eric Leclair	Date 03/09/12
Material VicoSeal™ 106C - 60 DURO	
Colour BLACK	
Finish SEE NOTES	



VICONE High Performance Rubber Inc.
12-216 Poinier Street
St. Eustache, Quebec, J7R 6B1
www.viconerubber.com
877-VICONE2 (842-6632)

Title -
HEX SAMPLE #11

DWG #
MD00422

Scale:2:1

Sheet 1 of 1

Rev #
00