
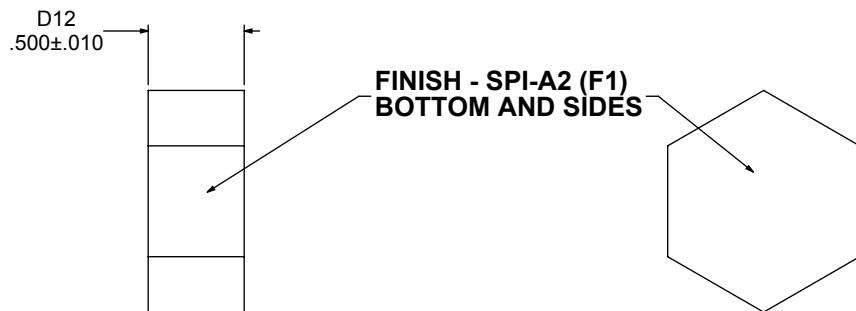


**FUTURA Md Bt FONT 0.060" HEIGHT
CENTERED IN POCKET, FLUSH
TO SURFACE**

**TOP FINISH - SPI-B2
NO TOOL OR SCUFF MARKS**



SCALE 1:1

Tensile Strength	ASTMD412	Mpa	8
Elongation at break	ASTMD412	%	551.6
Hardness	ASTMD2240		54
Compression set (22hrs @ 175°C)	ASTMD395	%	6.43
Density	ASTMD3165		1.166
Heat aging (70hrs @ 200°C)			
Change in Tensile strength	ASTMD573	%	-21.2
Change in Elongation	ASTMD573	%	-37.3
Change in Hardness	ASTMD573		9.3
Compression Stress Modulus			
Compression 5%		Mpa	0.39
Compression 10%		Mpa	0.71
Compression 20%		Mpa	1.4
Compression 25%		Mpa	1.74

NOTES:

ANTI-FUNGAL GRADE 1 (GB/T 2423.16-2008), RoHS APPROVED

This drawing, design, and/or concept, along with all of the contents herein are the exclusive ownership of Vicone High Performance Rubber Inc. Its reproduction and/or distribution are strictly prohibited. Copyright Vicone High Performance Rubber Inc.

TOLERANCES - IMPERIAL
(unless specified otherwise)

RMA-A3-T0.016"



Drawn John Fisher	Date 05/10/11
Checked Eric Leclair	Date 07/07/11
Approved Eric Leclair	Date 03/09/12
Material VicoSil™KC605Q - 50 DURO	
Colour ORANGE PMS 144	
Finish SEE NOTES	



VICONE High Performance Rubber Inc.
12-216 Pointier Street
St. Eustache, Quebec, J7R 6B1
www.viconerubber.com
877-VICONE2 (842-6632)

Title -
HEX SAMPLE #4

Scale:2:1

Sheet 1 of 1

DWG #
MD00415

Rev #
00